

Can be used alone or included in the PMH Vinicole receiving line

TECHNICAL FEATURES:


- Full stainless steel construction
- Conveyor length 180mm
- Conveyor has 4 slats per metre (25mm height)
- Gear motor driven
- Foot element with stainless steel squirrel cage drum
- 2 foldable shutters forming a hopper once deployed
- Two handles at the ends
- Motorisation and on/off switch at the end avoiding any contact with the harvest

OPTION

- Filter available in aluminium
- remote control
CENOTELEC®


ELECTRICAL CONNECTIONS

- 10 metres of electric cable with standard jack
- equipped with its forward/reverse switch and emergency stop button

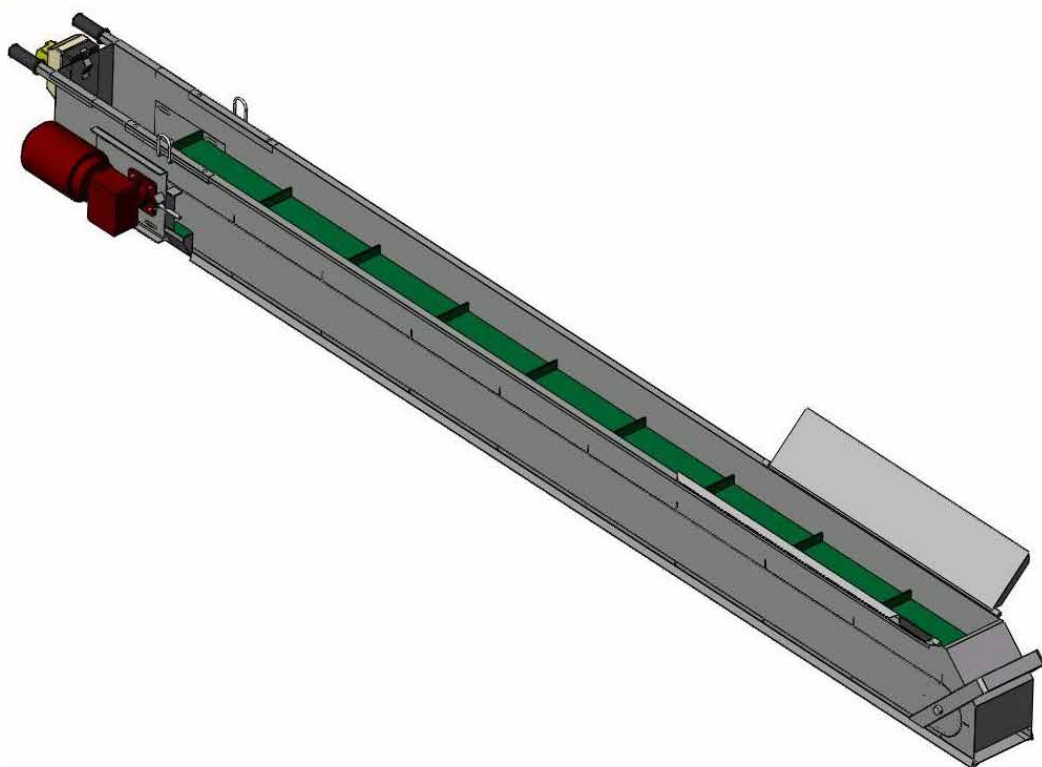


Models	Flow Fermented harvest	Power of geared motor	Usable length	Total length	Belt width	Aluminium filter weight	Stainless steel filter weight
DT 18202	20 to 25 T/h	0.55 kW	1900 mm	2485 mm	180 mm	38kg	54 kg
DT 18302	20 to 25 T/h	0.55 kW	2900 mm	3485 mm	180 mm	47 kg	73 kg

FILTER CONVEYOR DT 18202

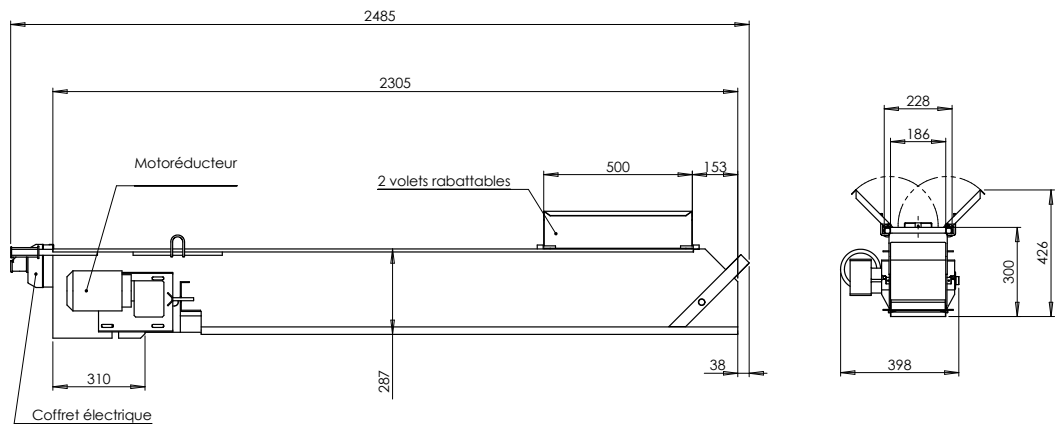

FILTER CONVEYOR DT 18302

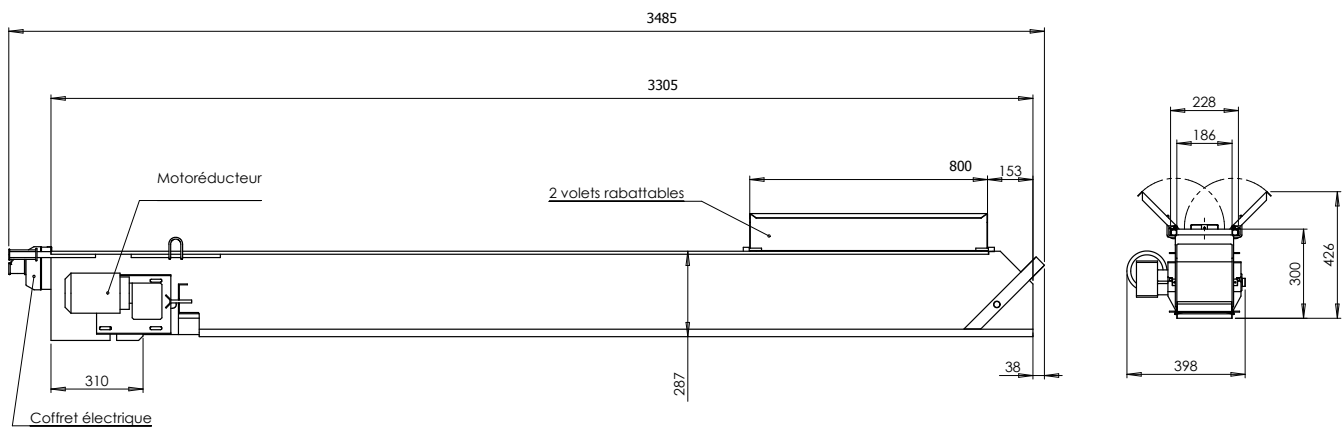

Non-contractual pictures - In the event of a quality concern, PMH Vinicole reserves the right to improve the technical specifications of their products at any time and without notice. 04/2018

ZA - 41 allée de la Croix des Hormes - 69250 Montanay
Tel. +33 (0)4 72 21 83 00 - Fax +33 (0)4 72 51 43 17
info@pmh-vinicole.fr

PMH VINICOLE

TRADITIONAL MATERIALS & INNOVATIVE SOLUTIONS

www.pmh-vinicole.fr